


# PRESS-IN BRASS EXPANSION INSERTS

(BANC-LOK™)

Press-in expansion inserts, which due to their diamond knurl pattern, give minimum penetration of the sides of the hole without sacrificing pull-out resistance. This makes them ideally suited for applications into hard thermoplastics. Flush fitting and headed versions available.

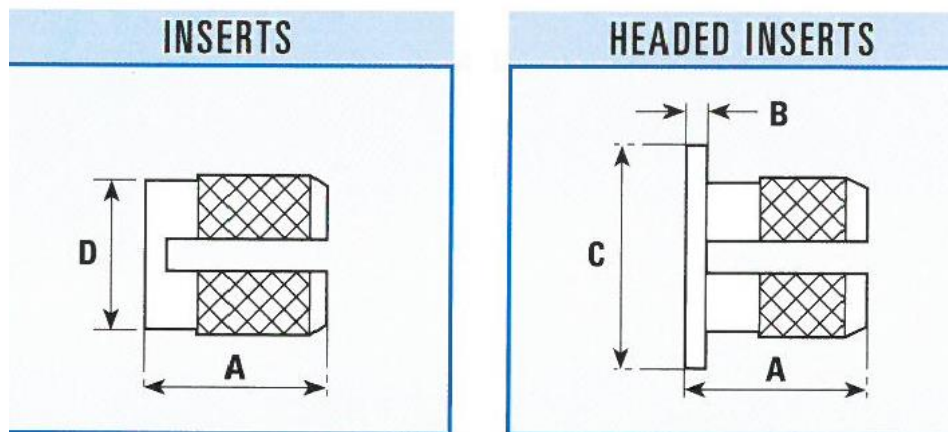

Thread	A	B	C	D	Rec.hole - 0.00/+0.10	Min wall thickness
M3	4.70	0.51	5.50	4.00	4.00	3.20
M3.5	6.30	0.66	6.40	4.70	4.80	3.60
M4	7.90	0.82	7.10	5.50	5.60	4.00
M5	9.40	0.99	7.90	6.30	6.40	4.80
M6	12.60	1.25	9.50	7.90	8.00	6.00

All dimensions in mm,s