


## HARDENED & GROUND DOWEL PINS DIN6325-M6

Hardened and ground dowel pins to DIN6325-M6 tolerance. Fully hardened and tempered with a fine ground finish to M6 tolerance. Turned tip and edge. Hardness  $60 \pm 2$  HRC.

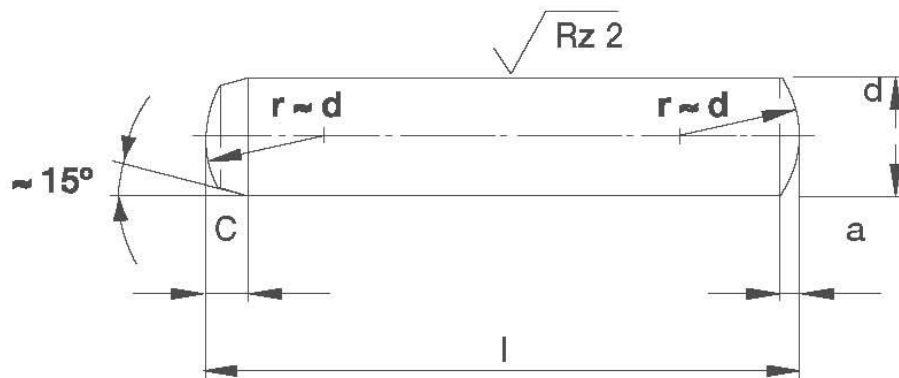

d m6	a ≈	c	R1	
			Min.	Max.
1.00	0.12	0.50	-	-
1.50	0.20	0.60	0.20	0.60
2.00	0.25	0.80	0.20	0.60
2.50	0.30	1.00	0.30	0.70
3.00	0.40	1.20	0.30	0.80
4.00	0.50	1.40	0.40	0.90
5.00	0.63	1.70	0.40	1.00
6.00	0.80	2.10	0.40	1.10
8.00	1.00	2.60	0.50	1.30
10.00	1.20	3.00	0.60	1.40
12.00	1.60	3.80	0.60	1.60
16.00	2.00	4.60	0.80	1.80
20.00	2.50	6.00	0.80	2.00

All dimensions in mm