


EXTERNAL TOOTHED SHAKEPROOF WASHERS DIN6797A

External toothed shakeproof washer to DIN6797A. Suitable for moderate clamping. The use of these washers is recommended on flat surfaces when the bearing surface is greater than the external diameter of the washer. Available in steel, steel zinc plated and Stainless Steel Grade A2 & A4

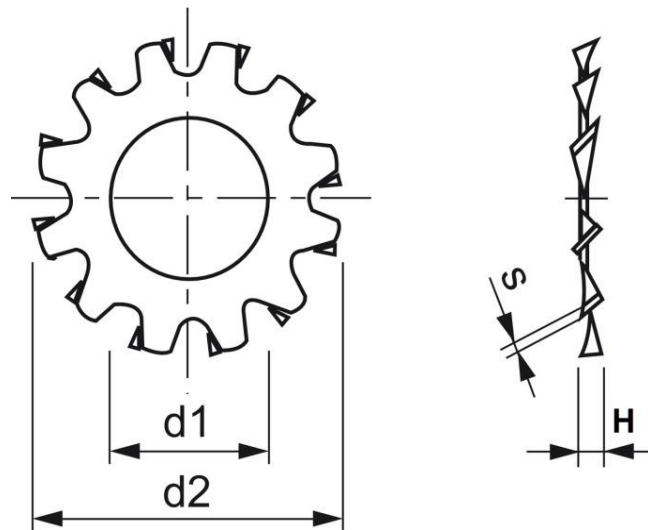

Nom.	d1	d2	S	H
M2	2.20	4.50	0.30	0.30
M3	3.20	6.00	0.40	0.40
M4	4.30	8.00	0.50	0.50
M5	5.30	10.00	0.60	0.60
M6	6.40	11.00	0.70	0.60
M8	8.40	15.00	0.80	0.80
M10	10.5	18.00	0.90	1.00
M12	13.0	20.50	1.00	1.00
M14	15.0	24.00	1.00	1.20
M16	16.5	26.00	1.20	1.20
M20	21.0	33.00	1.40	1.50
M24	25.0	38.00	1.50	1.50

All dimension's in mm