



Product Information


A zinc plated and yellow passivated, thin walled sleeve anchor. Suitable for use in non-cracked concrete, dense concrete blocks, solid bricks and some natural stone.

Features


Through Fixing
 Light to medium duty loads
 Torque controlled expansion
 Collapse feature to allow a positive clamping force
 Supplied pre-assembled for rapid installation

| Range Data | | | | | | | | | | |
|-------------|------------|-----------------------|-----------|---------------------------|------------------------|-----------------|--------------------|------------|-----------------------------|---------------------|
| Part Number | Drill Diam | Overall Anchor Length | Head Diam | Maximum Fixture Thickness | Fixture Clearance Hole | Embedment Depth | Minimum Hole Depth | Head Drive | Minimum Structure Thickness | Installation Torque |
| mm | mm | mm | mm | mm | mm | | mm | Phillips | mm | Nm |
| SLC08060 | 8 | 65 | 14 | 30 | 10 | 35 | 40 | N°3 | 100 | 10 |
| SLC08085 | 8 | 88 | | 53 | | | | | | |
| SLC10075 | 10 | 78 | 16 | 38 | 12 | 40 | 45 | N°3 | 100 | 20 |
| SLC10100 | 10 | 100 | | 60 | | | | | | |

Installation Instructions



Position fixture and drill correct diameter hole to correct depth

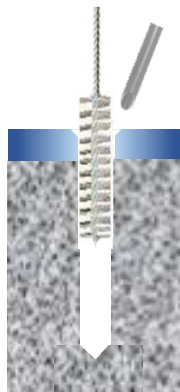

Clean hole by brushing and blowing to remove all dust and drilling debris



Insert assembled anchor through fixture into concrete



Tighten to recommended torque



Non-Cracked concrete

| Performance Data (C20/25 Concrete) | | | | | | | | | |
|------------------------------------|---------------------------|-------|-------------------|-------|------------------------|-------|-----------------|----------------------|-------|
| Outside Diam | Characteristic Resistance | | Design Resistance | | Recommended Resistance | | Design Spacing | Design Edge Distance | |
| mm | kN | | kN | | kN | | mm | mm | |
| | Tensile | Shear | Tensile | Shear | Tensile | Shear | Tensile & Shear | Tensile | Shear |
| 8 | 6.0 | 4.0 | 3.6 | 3.1 | 2.5 | 2.2 | 55 | 45 | 40 |
| 10 | 10.2 | 8.3 | 5.6 | 5.5 | 4.0 | 3.9 | 100 | 70 | 60 |

Shear Loads towards a free edge are for single anchors where Spacing $\geq 3 \times$ Edge Distance

Influence of concrete strength Not applicable with sleeve anchors

For variations in structure thickness, reduced spacing and edge calculations download the free [Anchor Calculation Program](http://www.jcpfixings.co.uk) from www.jcpfixings.co.uk

Solid Brickwork

| Performance Data (20 N/mm ²) | | | | | | | | | | |
|--|---------------------------|-------|-------------------|-------|------------------------|-------|---------------------|---------------------------|-------|-------------------|
| Outside Diameter | Characteristic Resistance | | Design Resistance | | Recommended Resistance | | Recommended Spacing | Recommended Edge Distance | | Tightening Torque |
| mm | kN | | kN | | kN | | mm | mm | | Nm |
| | Tensile | Shear | Tensile | Shear | Tensile | Shear | Tensile & Shear | Tensile | Shear | |
| 8 | 2.3 | 3.6 | 1.1 | 2.4 | 0.8 | 1.7 | 90 | 45 | 60 | 8 |
| 10 | 3.1 | 7.4 | 1.5 | 4.9 | 1.1 | 3.5 | 110 | 55 | 70 | 16 |

Solid Concrete Blocks

| Performance Data (7 N/mm ²) | | | | | | | | | | |
|---|---------------------------|-------|-------------------|-------|------------------------|-------|---------------------|---------------------------|-------|-------------------|
| Outside Diameter | Characteristic Resistance | | Design Resistance | | Recommended Resistance | | Recommended Spacing | Recommended Edge Distance | | Tightening Torque |
| mm | kN | | kN | | kN | | mm | mm | | Nm |
| | Tensile | Shear | Tensile | Shear | Tensile | Shear | Tensile & Shear | Tensile | Shear | |
| 8 | 1.5 | 2.1 | 0.7 | 1.4 | 0.5 | 1.0 | 90 | 45 | 60 | 6 |
| 10 | 2.3 | 4.4 | 1.1 | 2.9 | 0.8 | 2.0 | 110 | 55 | 70 | 12 |

Due to the variable nature of bricks and concrete blocks these figures are for guidance only