


## PIN HEX SOCKET BUTTON SCREW ISO7380

Pin hex socket button to ISO7380, suitable for use where a tamperproof finish is required.  
Available in steel zinc plated grade 4.6 and Stainless Steel grade A2 & A4.

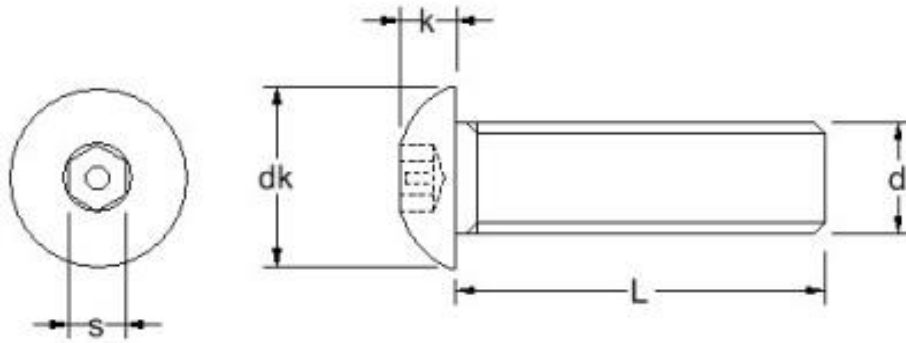

d Nom.	Pitch	dk Max.	k Max.	s Nom.
M3	0.50	5.70	1.65	2.00
M4	0.70	7.60	2.20	2.50
M5	0.80	9.50	2.75	3.00
M6	1.00	10.50	3.30	4.00
M8	1.25	14.00	4.40	5.00
M10	1.50	17.50	5.50	6.00
M12	1.75	21.00	6.60	8.00

All dimensions in mm