


ROUND RIVET BUSH

DATA SHEET

Round rivet bushes provide a strong female thread in sheet metal. The spigot is placed through a pre-punched hole and riveted on the reverse side. The serrated face provides excellent torque resistance. Various spigot lengths are available to suit different sheet thickness. Available in steel self-colour, steel zinc plated and Stainless Steel.

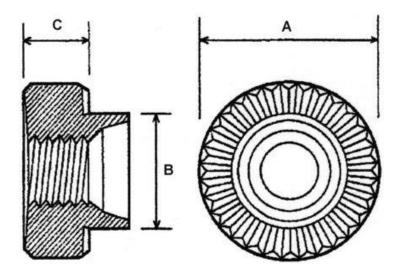

| Thread | Hole size | Α | С | В | Material Thickness |
|--|-----------|-------|--------|----------|------------------------|
| Nom. | +0.5 -0 | ±0.13 | ± 0.13 | +0 -0.13 | SWG/mm |
| M2.5* | 5.54 | 7.92 | 3.17 | 5.54 | 12G/2.6mm – 20G/0.91mm |
| M3 | 5.54 | 7.92 | 3.17 | 5.54 | 10G/3.2mm - 20G/0.91mm |
| M3.5* | 6.73 | 9.52 | 3.17 | 6.73 | 10G/3.2mm - 20G/0.91mm |
| M4 | 6.73 | 9.52 | 3.17 | 6.73 | 10G/3.2mm - 20G/0.91mm |
| M5 | 7.92 | 11.10 | 3.81 | 7.92 | 10G/3.2mm - 20G/0.91mm |
| M6 | 9.52 | 12.70 | 5.08 | 9.52 | 10G/3.2mm - 20G/0.91mm |
| M8 | 12.70 | 15.90 | 6.35 | 12.70 | 10G/3.2mm - 20G/0.91mm |
| M10 | 15.87 | 19.05 | 7.62 | 15.87 | 8G/4.0mm – 18G/1.2mm |
| M12 | 19.05 | 25.40 | 10.16 | 19.05 | 8G/4.0mm – 16G/1.6mm |
| All dimension's in mm *depotes non-preferred | | | | | |

All dimension's in mm

*denotes non-preferred size.