


## SOC CAP SCREW DIN912

Soc cap screws to DIN912 available in self colour grade 12.9, Zinc & De-Embrittled grade 12.9 and Stainless Steel Grades A2 & A4.

Available to order in grades 10.9 & 8.8 in self colour and plated.

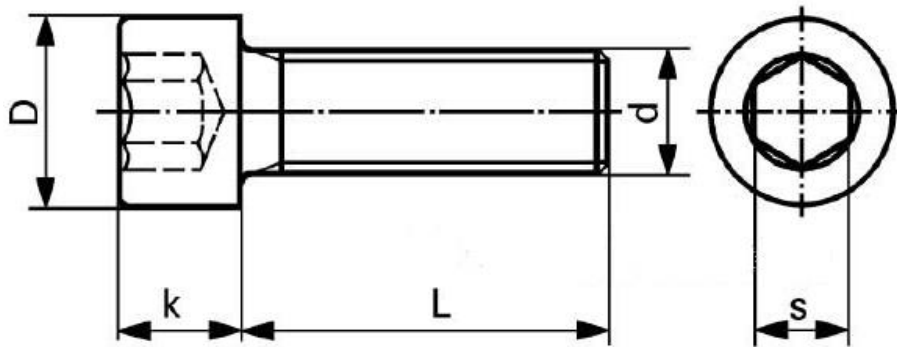

Nom. Thread Dia.	"D" Max. mm	"k" max. mm	"s" Nom. Key Size mm	Socket Depth mm	Radius Under Head mm	"L" Max. length Fully Threaded mm
M1.6	3.00	1.70	1.50	0.70	0.10	-
M2	3.80	2.00	1.50	1.00	0.10	16
M2.5	4.50	2.50	2.00	1.10	0.10	20
M3	5.50	3.00	2.50	1.30	0.20	20
M4	7.00	4.00	3.00	2.00	0.20	25
M5	8.50	5.00	4.00	2.50	0.25	25
M6	10.00	6.00	5.00	3.00	0.40	30
M8	13.00	8.00	6.00	4.00	0.40	35
M10	16.00	10.00	8.00	5.00	0.60	40
M12	18.00	12.00	10.00	6.00	0.60	50
M14	21.00	14.00	12.00	7.00	0.60	55
M16	24.00	16.00	14.00	8.00	0.60	60
M18	27.00	18.00	14.00	9.00	0.80	65
M20	30.00	20.00	17.00	10.00	0.80	70
M22	33.00	22.00	17.00	11.00	0.80	70
M24	36.00	24.00	19.00	12.00	0.80	80
M27	40.00	27.00	19.00	13.50	1.00	90

Nom. Thread Dia.	"D" Max. mm	"k" max. mm	"s" Nom. Key Size mm	Socket Depth mm	Radius Under Head mm	"L" Max. length Fully Threaded mm
M30	45.00	30.00	22.00	15.50	1.00	100
M33	50.00	33.00	24.00	18.00	1.00	100
M36	54.00	36.00	27.00	19.00	1.00	110
M42	63.00	42.00	32.00	24.00	1.20	120

All dimensions in mm

**\*HIGH GRADE PRODUCTS IN CRITICAL APPLICATIONS\***

Electro-plating of products in grade 10 and above may cause hydrogen embrittlement. No responsibility can be taken for reduced loading or failure and any resulting claims from this. Please see ISO:4042 for further information.