


## SOC CAP SCREW FULLY THREADED

### ISO 4762

Fully threaded Soc cap screws to ISO 4762 available in self colour grade 8.8, 10.9 & 12.9, Zinc & De-Embrittled grade 8.8, 10.9 & 12.9 and Stainless Steel Grades A2 & A4.

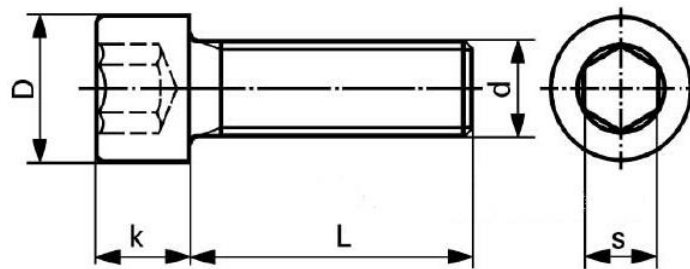

Nom. Thread Dia.	"d" Max. mm	"K" max. mm	"s" Nom. Key Size mm	Socket Depth mm	Radius Under Head mm
M1.6	3.00	1.70	1.50	0.70	0.10
M2	3.80	2.00	1.50	1.00	0.10
M2.5	4.50	2.50	2.00	1.10	0.10
M3	5.50	3.00	2.50	1.30	0.20
M4	7.00	4.00	3.00	2.00	0.20
M5	8.50	5.00	4.00	2.50	0.25
M6	10.00	6.00	5.00	3.00	0.40
M8	13.00	8.00	6.00	4.00	0.40
M10	16.00	10.00	8.00	5.00	0.60
M12	18.00	12.00	10.00	6.00	0.60
M14	21.00	14.00	12.00	7.00	0.60
M16	24.00	16.00	14.00	8.00	0.60
M18	27.00	18.00	14.00	9.00	0.80
M20	30.00	20.00	17.00	10.00	0.80
M22	33.00	22.00	17.00	11.00	0.80
M24	36.00	24.00	19.00	12.00	0.80
M27	40.00	27.00	19.00	13.50	1.00
M30	45.00	30.00	22.00	15.50	1.00

All dimensions in mm

**\*HIGH GRADE PRODUCTS IN CRITICAL APPLICATIONS\***

Electro-plating of products in grade 10 and above may cause hydrogen embrittlement. No responsibility can be taken for reduced loading or failure and any resulting claims from this. Please see ISO:4042 for further information.